



MOVINCOOL 30HU 3-TON Portable Conditioner

AIR-COOLED COMMERCIAL RENTAL UNIT





- This unit is rated to provide 39,000 btuh cooling capacity.
- Electrical: 220/3/60 volts, 14.0 MCA, 30 amp breaker.
- Unit weight: 353 pounds.
- Direct drive blowers (evaporator & condenser).
- Includes wagon & condensate tanks. Automatic pump available.
- Unit dimensions: 26" W x 43" H x 39" D
- Air Flow: evaporator 1060 CFM, condenser 2650 CFM
- Maximum length of cold air duct is 40 feet (12 inch round).
- Optional evaporator return air plenum available (16 inch round).
When using this limit return duct to 10 feet and supply to 15 feet.
- Bottom evaporator discharge requires rotating fan assembly.

APPLICATION:

The unit is placed outside the room to be cooled.

The evaporator supply (and sometimes also the return) are ducted into the room to be cooled, either through a window, through the wall or door, or into the system ductwork.

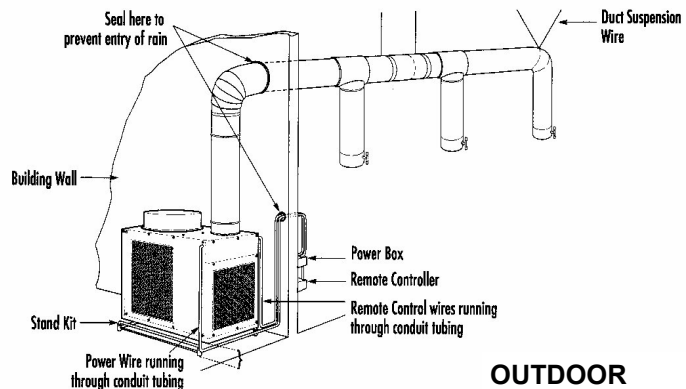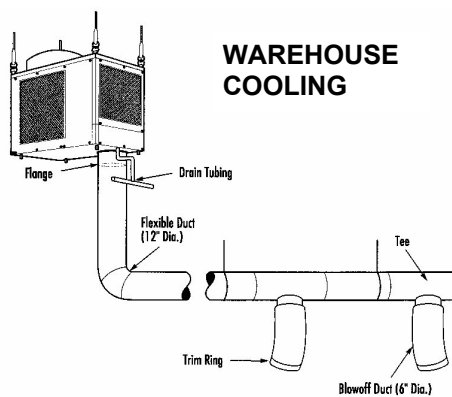

CONDENSER VENTING:

In order for there to be a net cooling effect the heat must be transferred outside of the space being cooled. This unit is usually installed outside of the room to be cooled. Please note that: the condenser fan on this unit is a propeller type, and is not designed for ducted applications that would result in any significant static pressure. The condenser can be ducted directly up into the false ceiling space, but please note that there is a significant amount of air-noise from this unit.